

Model

HYB-4000-A Hybrid Urinal with Jetrinse™ Solution Technology
Vitreous China Hybrid Urinal

DESCRIPTION

Complete vitreous china hybrid urinal.

Model HYB-4000-A

Code: 1004020

Waterfree Operation



SPECIFICATIONS

Urinal

- Wall hung, vitreous china
- Complete mounting kit included
- Patented high performance cartridge allows waterfree operation
- IAPMO certified to the applicable requirements in the following standards:
 - ASME A112.19.2/CSA B45.1
 - ASME A112.19.19
 - ASME A112.1.3

Jetrinse™ Assembly

- Patented housing and drain line rinsing
- Automatic activation injects 1 gallon of water through housing and drain line to every 72 hours to prevent struvite build-up and prevent clogs
- IR switch for manual rinse activation
- Long life lithium battery provides at least 8 years of service

Cartridge Assembly*

- Enhance patented design maximizes operational life, prevents accidental sealant loss and virtually eliminates odor
- Biodegradable sealant liquid
- Vandal resistant locking design
- 20% less plastic than previous designs
- Provides average of 7,000 uses that saves up to 40,000 gallons of water each year

* Replacement cartridges sold separately

Features

- Patented drain rinsing assembly
 - Eliminates number one cause of drain line clogs
 - Minimizes cleaning effort
 - Virtually eliminates odor
- Touch-free hygienic operation
- Earns maximum LEED credits
- Up to 5 times cleaner than conventional flush urinals
- Best in class odor control



Meets the American Disabilities Guidelines and ANSI A117.1 requirements when installed at the proper height requirements for accessibility.

Product Specification
Hybrid urinal shall be made of vitreous china and provide waterfree operation. Urinal shall have a 2" NPT outlet connection. Urinal shall include automatic Jetrinse™ feature with 3/8" compression hose connection. Jetrinse™ feature automatically cleans housing and drain every 72 hours with 1 gallon of water. Urinal shall be Sloan Model HYB-4000-A.

Featuring



This space for Architect/Engineer approval	
Job Name	Date
Model Specified	Quantity
Variations Specified	
Customer/Wholesaler	
Contractor	
Architect	

SLOAN

10500 Seymour Avenue
Franklin Park, IL 60131
Phone: 1-800-982-5839
Fax: 1-800-447-8329
sloanvalve.com

© 2015 Sloan Valve Company
HYB-4000-A 08-14-15

► **Description**

Complete Vitreous China Hybrid Urinal with automatic drain rinse.

► **Dimensions**

22 5/8" (575 mm) x 15 3/8" (391 mm) x 14" (356 mm)

► **Approximate Weight**

43 lbs.

► **Mounting For ADA Compliance**


For lip height of 17" (432 mm), distance from finished floor to drain centerline must be 10" (254 mm)

► **Drain Connection and Material**


Installs on standard 2-inch drain connections with threaded nipple. Suitable DWV materials include cast iron, galvanized steel, ABS and PVC.

IMPORTANT-Do not install on copper DWV due to copper's susceptibility to corrosion.

Housing and Jetrinse™ Assembly

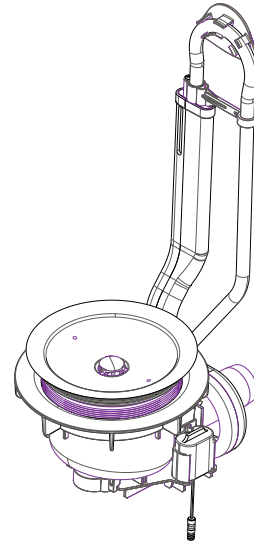

ROUGH-IN

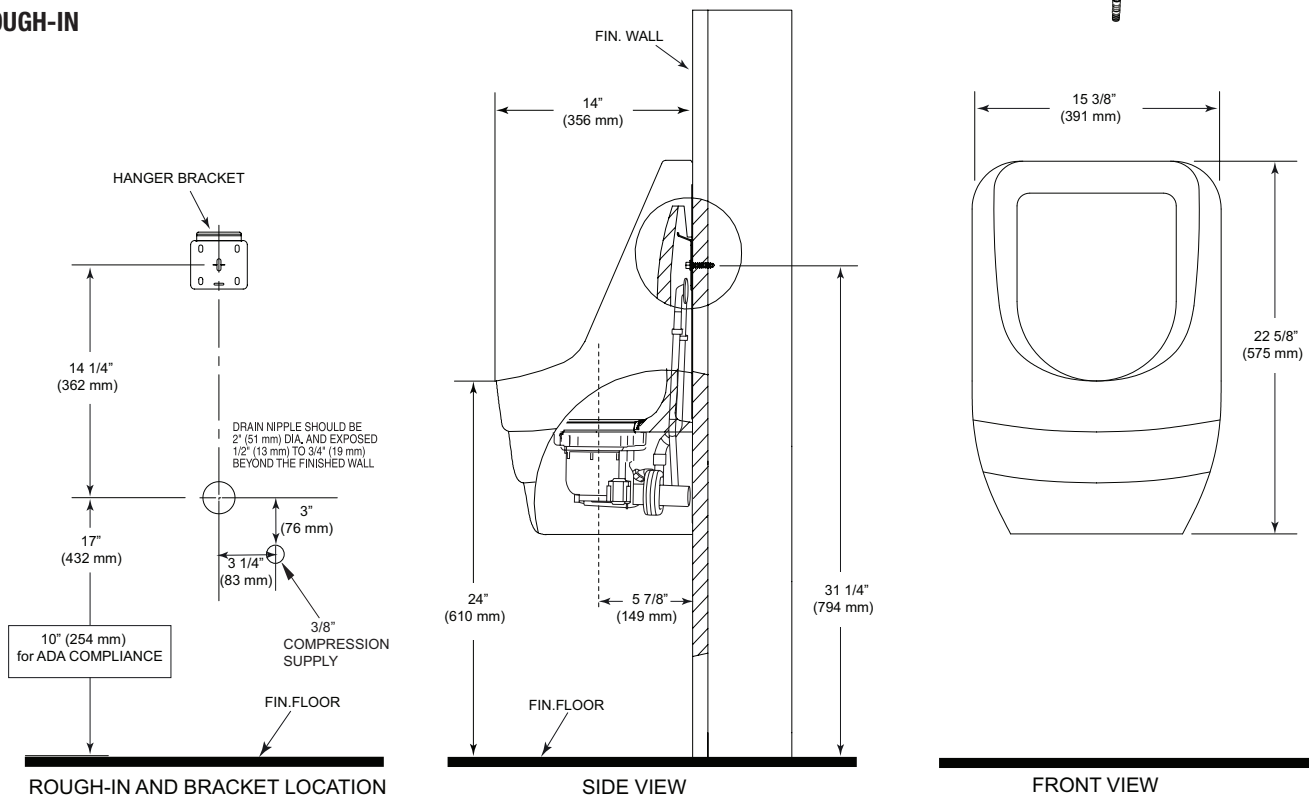

NOTE: All vitreous china dimensions shown in these drawings are nominal. Dimensions can vary within the tolerances established in the governing ASME A112.19.2/CSA B45.1 standard. Please take this into consideration when planning rough-in and plumbing layouts.