

# ETF-600

### ► Description

Chrome Plated Brass, Sensor Activated, 4" Center-set Electronic Hand Washing Faucet for tempered or hot/cold water operation.

### ► Flow Rate

- ☐ 0.5 gpm/1.9 Lpm Vandal Resistant Spray Head  
(See Accessories for other Spray Head options)

### ► Specifications

ADA Compliant, Sensor Activated, 24 VAC, Chrome Plated 4" Center-set Cast Brass, Hand Washing Faucet with the following features:

- Splash-proof Circuit Control Module
- Sensor Range Adjustment Screw
- Troubleshooting LED Indicator Lights
- User Friendly Variable Time Out Settings
- Filtered Solenoid Valve with serviceable Strainer Filter
- Bak-Chek<sup>®</sup> Tee for Hot/Cold Supply
- 120 VAC/24 VAC Transformer (specify Plug-in or Box Mount)
- Vandal Resistant Spray Head with Pressure Compensating Flow Control
- Metal Jacketed Wire Protection for Sensor and Solenoid Leads
- Modular Quick-Release Sensor and Solenoid Connections

### ► Variations

(Add suffix to Model Number for inclusion with Faucet)

#### • Trim Plate (optional)

- ☐ -8 Trim Plate for 8" Center-set Sink

#### • Transformer Type (must be specified)

- ☐ P Plug-in Transformer (furnished with ETF-233)
- ☐ B Box Mount (furnished with EL-248-40)
- ☐ LT Less Transformer (specify Transformer separately - See Accessories)

#### • Temperature Mixing Valves (optional)

- ☐ BDM Below Deck Mechanical Mixing Valve
  - ☐ BDT Below Deck Thermostatic Mixing Valve
- Bak-Chek<sup>®</sup> Tee not required or provided when a Temperature Mixing Valve is included with the faucet.

#### • Finishes

*Consult Factory for Finish Variations*

### ► Accessories (Specify separately)

#### • Transformers

- ☐ ETF-233 120 VAC/24 VAC, 50/60 Hz (35 VA) - Plug-in  
(will operate up to 2 faucets)
- ☐ EL-248-40 120 VAC/24 VAC, 50/60 Hz (40 VA) - Box Mount  
(will operate up to 2 faucets)
- ☐ EL-154 120 VAC/24VAC, 50/60 Hz (50 VA) - Box Mount  
(will operate up to 3 faucets)
- ☐ EL-208 120 VAC/24 VAC, 50/60 Hz (100 VA) - Foot Mount  
(will operate up to 6 faucets)
- ☐ EL-342 240 VAC/24 VAC, 50/60 Hz (50 VA) - Box Mount  
(will operate up to 3 faucets)

#### • Vandal Resistant Spray Heads

- ☐ ETF-1029-A 2.2 gpm/8.3 Lpm Laminar Flow Spray Head  
(recommended for medical applications)
- ☐ ETF-1024-A 2.2 gpm/8.3 Lpm Aerator

#### • Grid Strainer

- ☐ ETF-460-A Chrome Plated Brass Grid Strainer w/1¼" Outlet Tube

See OPTIMA Accessories Section of the Sloan Catalog for a complete listing of OPTIMA Faucet Accessories and Variations.



### ► Automatic

The Sloan OPTIMA<sup>®</sup> ETF-600 Electronic Hand Washing Faucet operates by means of an infrared sensor. Once the user's hands enter the sensor's effective range, the Solenoid activates the water flow. Tempered water flows from the Faucet until hands are moved away. The Faucet then automatically shuts off.

### ► Hygienic

The ultimate in sanitary protection — there are no handles to turn or buttons to push. Helps to control the spread of infectious diseases. Ideal for high traffic commercial installations.

### ► Economical


Automatic operation provides water usage savings over other faucet devices. Reduces maintenance and operation costs. The 4" Center-set design makes the ETF-600 Faucet secure against abuse and vandalism.

### ► Warranty

3 year (limited)

### ► Compliant to:

ASME A112.18.1



This product may contribute to LEED credits. See details on LEED calculation worksheet.

This space for Architect/Engineer approval

Job Name _____	Date _____
Model Specified _____	Quantity _____
Variations Specified _____	
Customer/Wholesaler _____	
Contractor _____	
Architect _____	

# ETF-600

## Description

Chrome Plated Brass, Sensor Activated, 4" Center-set Electronic Hand Washing Faucet for tempered or hot/cold water operation.

## Flow Rate

□ 0.5 gpm/1.9 Lpm Vandal Resistant Spray Head  
(See Accessories for other Spray Head options)

## ELECTRICAL SPECIFICATIONS

### Control Circuit

24 VAC Input/Output, 50/60 Hz, Adjustable Range & Time Out Settings, Modular Plugs & Troubleshooting LED Indicators

### OPTIMA® Sensor Range

Factory Set: 4" - 5" (102 mm - 127 mm)  
Adjustable: 1" - 14" (25 mm - 356 mm)

### Solenoid Valve

24 VAC 50/60 Hz with integral strainer filter & 3/8" Compression Connection Inlet/Outlet.

### Time Out Adjustment Settings

3, 6, 12, 30 & 45 seconds; 1, 3 & 20 minutes. The Faucet Time Out Setting determines the maximum time the faucet will run upon continuous activation. This timing can be changed to meet individual application requirements. Unless otherwise specified the ETF-600 is factory set at the 30 second time out.

### Transformer

All Sloan Transformers are 50/60 Hz.

Multiple faucets can be powered by a single transformer, provided that the transformer has been properly sized. Allow a minimum of 15 VA of current rating for each faucet being used.

Plug-in	ETF-233	120 VAC/24 VAC - 35 VA (supplied with "P" variation)
Box Mount	EL-248-40	120 VAC/24 VAC - 40 VA (supplied with "B" variation)
Box Mount	EL-154	120 VAC/24 VAC - 50 VA
Foot Mount	EL-208	120 VAC/24 VAC - 100 VA
Box Mount	EL-342	240 VAC/24 VAC - 50 VA


### Max. Distance Control Module may be Installed from Spout

With Standard Cable: 12" (305 mm)

### Extension Cables (Optional)


From Sensor to Control Module:		From Solenoid Valve to Control Module:	
ETF-1005-26	26" (660 mm)	ETF-1003-36	36" (914 mm)
ETF-1005-36	36" (914 mm)	ETF-1003-48	48" (1219 mm)
ETF-1005-72	72" (1829 mm)	ETF-1003-72	72" (1829 mm)
ETF-1005-108	108" (2743 mm)	ETF-1003-108	108" (2743 mm)

## FAUCET DIMENSIONS

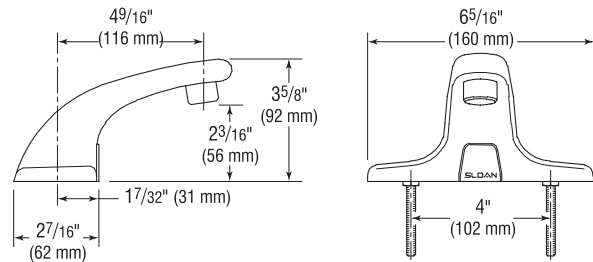

## OPERATION


1. A continuous invisible beam of light is emitted from the OPTIMA® Sensor located at the base of the lavatory faucet.




2. As the user's hands enter the beam's effective range, the beam is reflected back into the Sensor Receiver and activates the Solenoid Valve allowing tempered water to flow from the faucet. Water will flow until the hands are removed or until the faucet reaches its automatic time out limit setting.




3. When hands are moved away from the OPTIMA® Sensor, the loss of reflected light initiates an electrical signal that deactivates the Solenoid Valve, shutting off the water flow. The Circuit then automatically resets and is ready for the next user.



### ETF-600 Faucet with Bak-Chek® Tee for Hot and Cold Water Supply

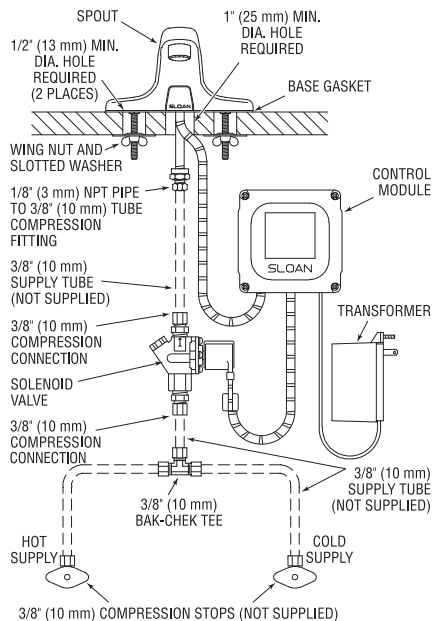

### ETF-600 Faucet with BDM and BDT Variation Mixing Valves for Hot and Cold Water Supply

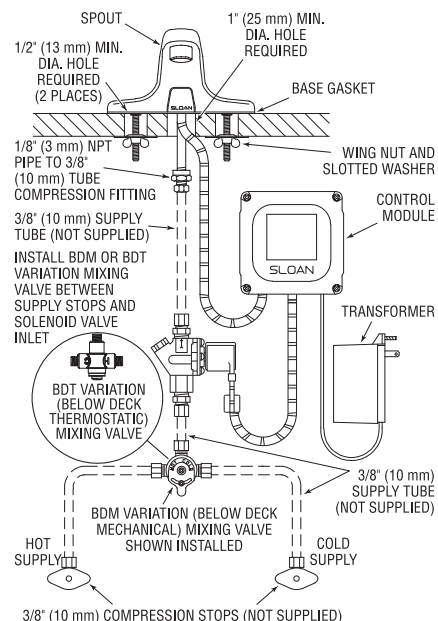

**SLOAN • 10500 SEYMOUR AVENUE • FRANKLIN PARK, IL 60131**

Phone: 1-800-982-5839 or 1-847-671-4300 • Fax: 1-800-447-8329 or 1-847-671-4380 • [www.sloanvalve.com](http://www.sloanvalve.com)

# ETF-610

### ► Description

Chrome Plated Brass, Sensor Activated, Pedestal Electronic Hand Washing Faucet for tempered or hot/cold water operation.

### ► Flow Rate

☐ 0.5 gpm/1.9 Lpm Vandal Resistant Spray Head  
(See Accessories for other Spray Head options)

### ► Specifications

ADA Compliant, Sensor Activated, 24 VAC, Chrome Plated Cast Brass, Pedestal Hand Washing Faucet with the following features:

- Splash-proof Circuit Control Module
- Sensor Range Adjustment Screw
- Troubleshooting LED Indicator Lights
- User Friendly Variable Time Out Settings
- Filtered Solenoid Valve with serviceable Strainer Filter
- Bak-Chek<sup>®</sup> Tee for Hot/Cold Supply
- 120 VAC/24 VAC Transformer (specify Plug-in or Box Mount)
- Vandal Resistant Spray Head with Pressure Compensating Flow Control
- Metal Jacketed Wire Protection for Sensor and Solenoid Leads
- Modular Quick-Release Sensor and Solenoid Connections

### ► Variations

(Add suffix to Model Number for inclusion with Faucet)

#### • Trim Plate (must be specified)

- ☐ -4 Trim Plate for 4" Center-set Sink  
☐ -8 Trim Plate for 8" Center-set Sink

#### • Transformer Type (must be specified)

- ☐ P Plug-in Transformer (furnished with ETF-233)  
☐ B Box Mount (furnished with EL-248-40)  
☐ LT Less Transformer  
(specify Transformer separately - See Accessories)

#### • Temperature Mixing Valves (optional)

- ☐ ADM Above Deck Mechanical Mixing Valve  
(only available for installation on 8" center-set sinks)  
☐ BDM Below Deck Mechanical Mixing Valve  
☐ BDT Below Deck Thermostatic Mixing Valve

Bak-Chek<sup>®</sup> Tee not required or provided when a Temperature Mixing Valve is included with the faucet.

*Consult Factory for Finish Variations*

### ► Accessories (Specify separately)

#### • Transformers

- ☐ ETF-233 120 VAC/24 VAC, 50/60 Hz (35 VA) - Plug-in  
(will operate up to 2 faucets)  
☐ EL-248-40 120 VAC/24 VAC, 50/60 Hz (40 VA) - Box Mount  
(will operate up to 2 faucets)  
☐ EL-154 120 VAC/24 VAC, 50/60 Hz (50 VA) - Box Mount  
(will operate up to 3 faucets)  
☐ EL-208 120 VAC/24 VAC, 50/60 Hz (100 VA) - Foot Mount  
(will operate up to 6 faucets)  
☐ EL-342 240 VAC/24 VAC, 50/60 Hz (50 VA) - Box Mount  
(will operate up to 3 faucets)

#### • Vandal Resistant Spray Heads

- ☐ ETF-1029-A 2.2 gpm/8.3 Lpm Laminar Flow Spray Head  
(recommended for medical applications)  
☐ ETF-1024-A 2.2 gpm/8.3 Lpm Aerator

#### • Grid Strainer

- ☐ ETF-460-A Chrome Plated Brass Grid Strainer w/1¼" Outlet Tube

See OPTIMA Accessories Section of the Sloan Catalog for a complete listing of OPTIMA Faucet Accessories and Variations.



### ► ADA Compliant

### ► Automatic

The Sloan OPTIMA<sup>®</sup> ETF-610 Electronic Hand Washing Faucet operates by means of an infrared sensor. Once the user's hands enter the sensor's effective range, the Solenoid activates the water flow. Tempered water flows from the Faucet until hands are moved away. The Faucet then automatically shuts off and resets for the next use.

### ► Hygienic

The ultimate in sanitary protection — there are no handles to turn or buttons to push. Helps to control the spread of infectious diseases. Ideal for high traffic commercial installations.

### ► Economical

Automatic operation provides water usage savings over other faucet devices. Reduces maintenance and operation costs.

### ► Warranty

3 year (limited)

### ► Compliant to:

ASME A112.18.1M



LISTED 376U



This product may contribute to LEED credits. See details on LEED calculation worksheet.

This space for Architect/Engineer approval

Job Name _____	Date _____
Model Specified _____	Quantity _____
Variations Specified _____	
Customer/Wholesaler _____	
Contractor _____	
Architect _____	

# ETF-610


## Description

Chrome Plated Brass, Sensor Activated, Pedestal Electronic Hand Washing Faucet for tempered or hot/cold water operation.

## Flow Rate

- 0.5 gpm/1.9 Lpm Vandal Resistant Spray Head
- (See Accessories for other Spray Head options)

## FAUCET DIMENSIONS

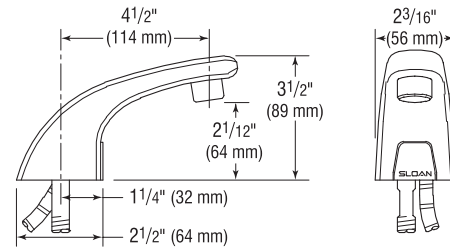

## ELECTRICAL SPECIFICATIONS

### Control Circuit

24 VAC Input/Output, 50/60 Hz, Adjustable Range & Time Out Settings, Modular Plugs & Troubleshooting LED Indicators

### OPTIMA® Sensor Range

Factory Set: 4" - 5" (102 mm - 127 mm)  
 Adjustable: 1" - 14" (25 mm - 356 mm)

### Solenoid Valve

24 VAC 50/60 Hz with integral strainer filter & 3/8" Compression Connection Inlet/Outlet.

### Time Out Adjustment Settings

3, 6, 12, 30 & 45 seconds; 1, 3 & 20 minutes. The Faucet Time Out Setting determines the maximum time the faucet will run upon continuous activation. This timing can be changed to meet individual application requirements. Unless otherwise specified the ETF-610 is factory set at the 30 second time out.

### Transformer

All Sloan Transformers are 50/60 Hz.

Multiple faucets can be powered by a single transformer, provided that the transformer has been properly sized. Allow a minimum of 15 VA of current rating for each faucet being used.

Plug-in	ETF-233	120 VAC/24 VAC - 35 VA (supplied with "P" variation)
Box Mount	EL-248-40	120 VAC/24 VAC - 40 VA (supplied with "B" variation)
Box Mount	EL-154	120 VAC/24 VAC - 50 VA
Foot Mount	EL-208	120 VAC/24 VAC - 100 VA
Box Mount	EL-342	240 VAC/24 VAC - 50 VA

### Max. Distance Control Module may be Installed from Spout


With Standard Cable: 12" (305 mm)

### Extension Cables (Optional)


From Sensor to Control Module:		From Solenoid Valve to Control Module:	
ETF-1005-26	26" (660 mm)	ETF-1003-36	36" (914 mm)
ETF-1005-36	36" (914 mm)	ETF-1003-48	48" (1219 mm)
ETF-1005-72	72" (1829 mm)	ETF-1003-72	72" (1829 mm)
ETF-1005-108	108" (2743 mm)	ETF-1003-108	108" (2743 mm)

## OPERATION


1. A continuous invisible beam of light is emitted from the OPTIMA® Sensor located at the base of the lavatory faucet.




2. As the user's hands enter the beam's effective range, the beam is reflected back into the Sensor Receiver and activates the Solenoid Valve allowing tempered water to flow from the faucet. Water will flow until the hands are removed or until the faucet reaches its automatic time out limit setting.




3. When hands are moved away from the OPTIMA® Sensor, the loss of reflected light initiates an electrical signal that deactivates the Solenoid Valve, shutting off the water flow. The Circuit then automatically resets and is ready for the next user.




### ETF-610 Faucet with Bak-Chek® Tee for Hot and Cold Water Supply (shown with 4" trim plate)

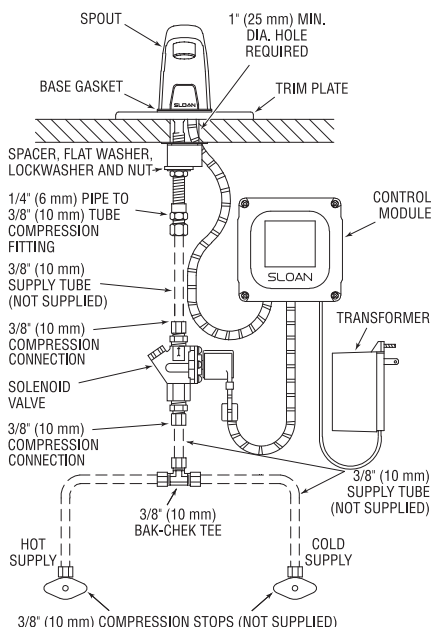

### ETF-610 Faucet with ADM Variation Mixing Valve for Hot and Cold Water Supply (shown with 8" trim plate)

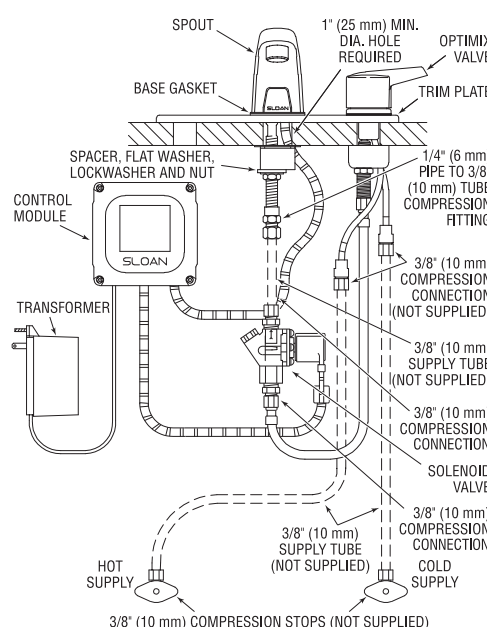

### ETF-610 Faucet with BDM and BDT Variation Mixing Valves for Hot and Cold Water Supply (shown with 4" trim plate)

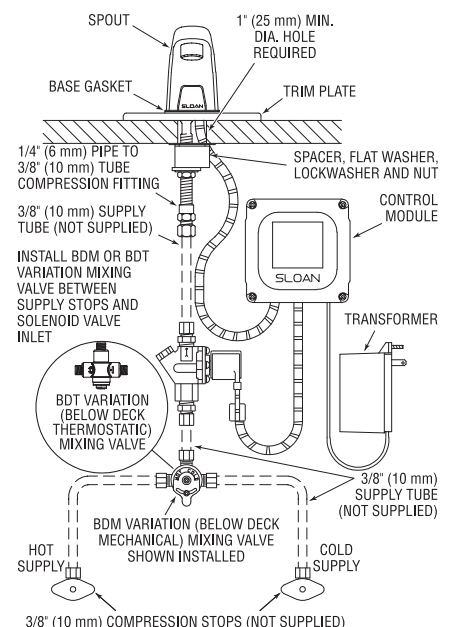

**SLOAN VALVE COMPANY • 10500 SEYMOUR AVENUE • FRANKLIN PARK, IL 60131**

Phone: 1-800-982-5839 or 1-847-671-4300 • Fax: 1-800-447-8329 or 1-847-671-4380 • [www.sloanvalve.com](http://www.sloanvalve.com)

# EBF-615

### ► Description

Battery Powered, Sensor Activated, Chrome Plated Brass Pedestal Electronic Hand Washing Faucet for tempered or hot/cold water operation.

### ► Flow Rate

0.5 gpm/1.9 Lpm Vandal Resistant Spray Head  
(See Accessories for other Spray Head options)

### ► Specifications

ADA Compliant, Battery Powered, Sensor Activated, Chrome Plated Cast Brass, Pedestal Hand Washing Faucet with the following features:

- Splash-proof Circuit Control Module
- Sensor Range Adjustment Screw
- Low Battery LED Indicator Light
- User friendly Variable Time Out Settings
- Filtered Solenoid Valve with serviceable Strainer Filter
- Bak-Chek<sup>®</sup> Tee for Hot/Cold Supply
- Vandal Resistant Spray Head with Pressure Compensating Flow Control
- Metal Jacketed Wire Protection for Sensor Lead
- Includes four (4) AA-size Alkaline Batteries
- Includes appropriate Mounting Hardware
- Mounts on a single-hole lavatory or deck
- Optional 6 VDC Plug-in Transformer available (Batteries act as backup when using optional transformer)

### ► Variations

(Add suffix to Model Number for inclusion with Faucet)

#### • Trim Plate (must be specified)

- ☐ -4 Trim Plate for 4" Centerset Sink
- ☐ -8 Trim Plate for 8" Centerset Sink

#### • Temperature Mixing Valves (optional)

- ☐ ADM Above Deck Mechanical Mixing Valve  
(only available for installation on 8" centerset sinks)
  - ☐ BDM Below Deck Mechanical Mixing Valve
  - ☐ BDT Below Deck Thermostatic Mixing Valve
- Bak-Chek<sup>®</sup> Tee not required or provided when a Temperature Mixing Valve is included with the faucet.

*Consult Factory for Finish Variations*

### ► Accessories (Specify separately)

#### • Vandal Resistant Spray Heads

- ☐ ETF-1029-A 2.2 gpm/8.3 Lpm Laminar Flow Spray Head  
(recommended for medical applications)
- ☐ ETF-1024-A 2.2 gpm/8.3 Lpm Aerator

#### • Grid Strainer

- ☐ ETF-460-A Chrome Plated Brass Grid Strainer w/1¼" Outlet Tube

#### • Transformer

- ☐ SFP-6 120 VAC/6 VDC Plug-in Transformer

See OPTIMA Accessories Section of the Sloan Catalog for a complete listing of OPTIMA Faucet Accessories and Variations.



### ► ADA Compliant

### ► Automatic

The Sloan OPTIMA Plus<sup>®</sup> EBF-615 Battery Powered Hand Washing Faucet operates by means of an infrared sensor. Once the user's hands enter the sensor's effective range, the Solenoid activates the water flow. Tempered water flows from the Faucet until hands are moved away. The Faucet then automatically shuts off and resets for the next use.

### ► Hygienic

The ultimate in sanitary protection — there are no handles to turn or buttons to push. Helps to control the spread of infectious diseases. Ideal for high traffic commercial installations.

### ► Economical

Automatic operation provides water usage savings over other faucet devices. Reduces maintenance and operation costs. Battery operation is ideal for Retrofit installations. Optional plug-in transformer available.

### ► Warranty

3 year (limited)

### ► Compliant to:

ASME A112.18.1M



This product may contribute to LEED credits. See details on LEED calculation worksheet.

This space for Architect/Engineer approval

Job Name _____	Date _____
Model Specified _____	Quantity _____
Variations Specified _____	
Customer/Wholesaler _____	
Contractor _____	
Architect _____	



# EBF-615


## Description

Battery Powered, Sensor Activated, Chrome Plated Brass Pedestal Electronic Hand Washing Faucet for tempered or hot/cold water operation.

## Flow Rate

0.5 gpm/1.9 Lpm Vandal Resistant Spray Head  
(See Accessories for other Spray Head options)

## FAUCET DIMENSIONS

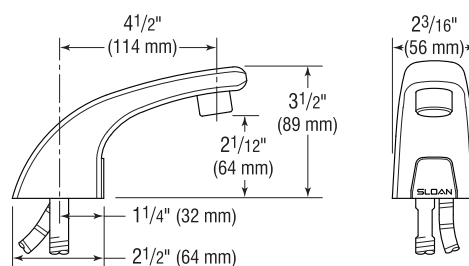

## ELECTRICAL SPECIFICATIONS

### Control Circuit

6 VDC — operates on four (4) alkaline AA-size batteries.  
Optional 6 VDC plug-in Transformer

### Battery Life

2 years at 8,000 cycles/month

### Indicator Lights

Range Adjustment/Low Battery

### OPTIMA® Sensor Range

Factory Set: 4" - 5"  
(102 mm - 127 mm)  
Adjustable: 2" - 7"  
(51 mm - 178 mm)

### Solenoid Valve

Filtered Solenoid Valve with serviceable Strainer Filter

### Time Out Adjustment Settings


30 seconds — The Faucet Time Out Setting determines the maximum time the faucet will run upon continuous activation. The EBF-615 is factory set at the 30 second time out. Consult factory for time out settings to meet individual application requirements.

### Max. Distance Control Module may be Installed from Spout


With Standard Cable: 15" (381 mm)

## OPERATION


1. A continuous invisible beam of light is emitted from the OPTIMA® Sensor located at the base of the lavatory faucet.




2. As the user's hands enter the beam's effective range, the beam is reflected back into the Sensor Receiver and activates the Solenoid Valve allowing tempered water to flow from the faucet. Water will flow until the hands are removed or until the faucet reaches its automatic time out limit setting.




3. When hands are moved away from the OPTIMA® Sensor, the loss of reflected light initiates an electrical signal that deactivates the Solenoid Valve, shutting off the water flow. The Circuit then automatically resets and is ready for the next user.




**EBF-615 Faucet with Bak-Chek® Tee for Hot and Cold Water Supply (shown with 4" trim plate)**

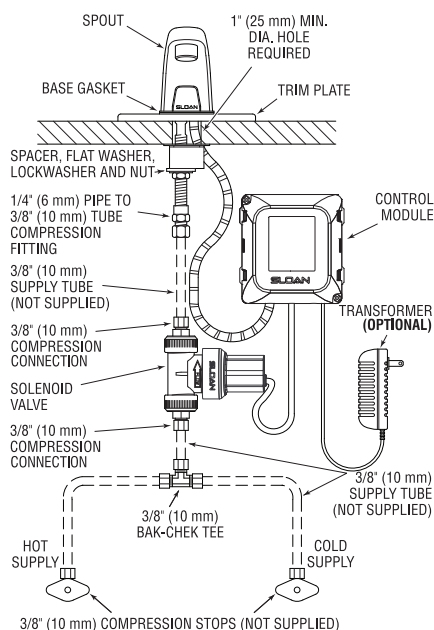

**EBF-615 Faucet with ADM Variation Mixing Valve for Hot and Cold Water Supply (shown with 8" trim plate)**

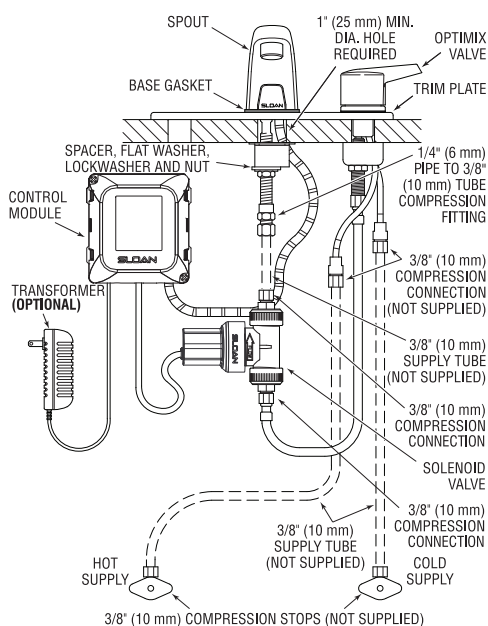

**EBF-615 Faucet with BDM and BDT Variation Mixing Valves for Hot and Cold Water Supply (shown with 4" trim plate)**

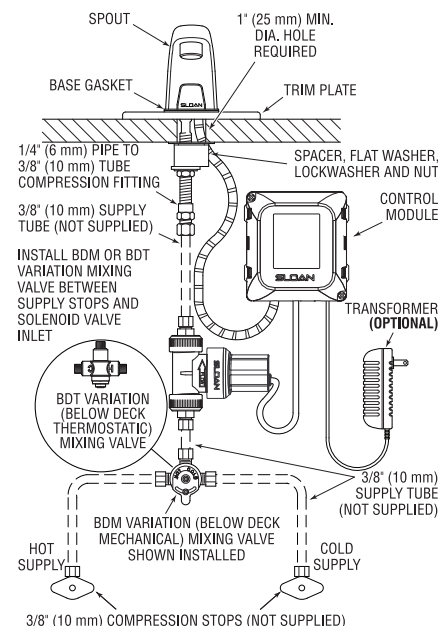

**SLOAN VALVE COMPANY • 10500 SEYMOUR AVENUE • FRANKLIN PARK, IL 60131**

Phone: 1-800-9-VALVE-9 or 1-847-671-4300 • Fax: 1-800-447-8329 or 1-847-671-4380 • [www.sloanvalve.com](http://www.sloanvalve.com)

# EBF-625

### ► Description

Battery Powered, Sensor Activated, Chrome Plated Brass Pedestal Electronic Hand Washing Faucet for tempered or hot/cold water operation.

### ► Flow Rate

0.5 gpm/1.9 Lpm Vandal Resistant Spray Head  
(See Accessories for other Spray Head options)

### ► Specifications

ADA Compliant, Battery Powered, Sensor Activated, Chrome Plated Cast Brass, Pedestal Hand Washing Faucet with the following features:

- Splash-proof Circuit Control Module
- Sensor Range Adjustment Screw
- Low Battery LED Indicator Light
- User friendly Variable Time Out Settings
- Filtered Solenoid Valve with serviceable Strainer Filter
- Bak-Chek® Tee for Hot/Cold Supply
- Vandal Resistant Spray Head with Pressure Compensating Flow Control
- Metal Jacketed Wire Protection for Sensor Lead
- Includes four (4) C-size Alkaline Batteries
- Includes appropriate Mounting Hardware
- Mounts on a single-hole lavatory or deck

### ► Variations

(Add suffix to Model Number for inclusion with Faucet)

#### ● Trim Plate (must be specified)

- ☐ -4 Trim Plate for 4" Centerset Sink  
☐ -8 Trim Plate for 8" Centerset Sink

#### ● Temperature Mixing Valves (optional)

- ☐ ADM Above Deck Mechanical Mixing Valve  
(only available for installation on 8" centerset sinks)  
☐ BDM Below Deck Mechanical Mixing Valve  
☐ BDT Below Deck Thermostatic Mixing Valve  
Bak-Chek® Tee not required or provided when a Temperature Mixing Valve is included with the faucet.

*Consult Factory for Finish Variations*

### ► Accessories (Specify separately)

#### ● Vandal Resistant Spray Heads

- ☐ ETF-1029-A 2.2 gpm/8.3 Lpm Laminar Flow Spray Head  
(recommended for medical applications)  
☐ ETF-1024-A 2.2 gpm/8.3 Lpm Aerator

#### ● Grid Strainer

- ☐ ETF-460-A Chrome Plated Brass Grid Strainer w/1¼" Outlet Tube

See OPTIMA Accessories Section of the Sloan Catalog for a complete listing of OPTIMA Faucet Accessories and Variations.



### ► ADA Compliant

### ► Automatic

The Sloan OPTIMA Plus® EBF-625 Battery Powered Hand Washing Faucet operates by means of an infrared sensor. Once the user's hands enter the sensor's effective range, the Solenoid activates the water flow. Tempered water flows from the Faucet until hands are moved away. The Faucet then automatically shuts off and resets for the next use.

### ► Hygienic

The ultimate in sanitary protection — there are no handles to turn or buttons to push. Helps to control the spread of infectious diseases. Ideal for high traffic commercial installations.

### ► Economical

Automatic operation provides water usage savings over other faucet devices. Reduces maintenance and operation costs. Battery operation is ideal for Retrofit installations.

### ► Warranty

3 year (limited)

### ► Compliant to: ASME A112.18.1



This space for Architect/Engineer approval

Job Name _____	Date _____
Model Specified _____	Quantity _____
Variations Specified _____	
Customer/Wholesaler _____	
Contractor _____	
Architect _____	

# EBF-625


## Description

Battery Powered, Sensor Activated, Chrome Plated Brass Pedestal Electronic Hand Washing Faucet for tempered or hot/cold water operation.

## Flow Rate

0.5 gpm/1.9 Lpm Vandal Resistant Spray Head  
(See Accessories for other Spray Head options)

## FAUCET DIMENSIONS

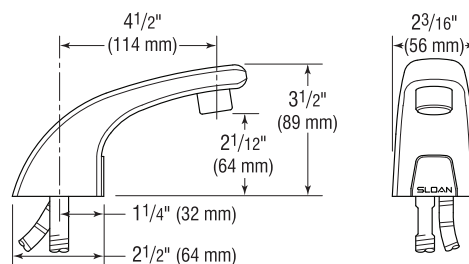

## ELECTRICAL SPECIFICATIONS

### Control Circuit

6 VDC — operates on four (4) alkaline C-size batteries.

### Battery Life

2 years at 8,000 cycles/month

### Indicator Lights

Range Adjustment/Low Battery

### OPTIMA® Sensor Range

Factory Set: 4" - 5"  
(102 mm - 127 mm)  
Adjustable: 2" - 7"  
(51 mm - 178 mm)

### Solenoid Valve

Filtered Solenoid Valve with serviceable Strainer Filter

### Time Out Adjustment Settings


30 seconds — The Faucet Time Out Setting determines the maximum time the faucet will run upon continuous activation. The EBF-625 is factory set at the 30 second time out. Consult factory for time out settings to meet individual application requirements.

### Max. Distance Control Module may be Installed from Spout


With Standard Cable: 15" (381 mm)

## OPERATION


1. A continuous invisible beam of light is emitted from the OPTIMA® Sensor located at the base of the lavatory faucet.




2. As the user's hands enter the beam's effective range, the beam is reflected back into the Sensor Receiver and activates the Solenoid Valve allowing tempered water to flow from the faucet. Water will flow until the hands are removed or until the faucet reaches its automatic time out limit setting.



3. When hands are moved away from the OPTIMA® Sensor, the loss of reflected light initiates an electrical signal that deactivates the Solenoid Valve, shutting off the water flow. The Circuit then automatically resets and is ready for the next user.



## EBF-625 Faucet with Bak-Chek® Tee for Hot and Cold Water Supply (shown with 4" trim plate)

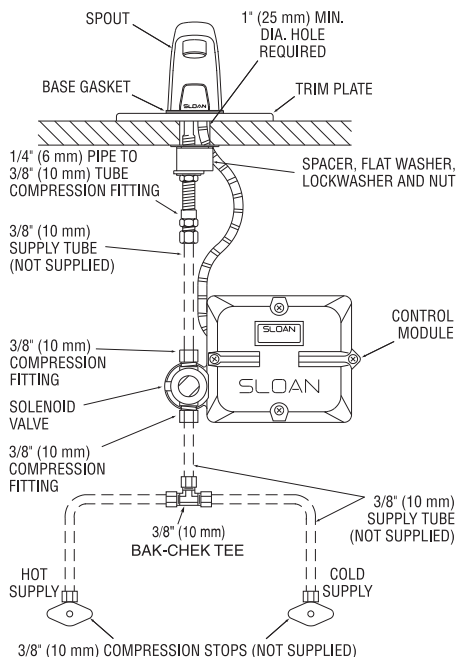

**SLOAN VALVE COMPANY • 10500 SEYMOUR AVENUE • FRANKLIN PARK, IL 60131**

Phone: 1-800-9-VALVE-9 or 1-847-671-4300 • Fax: 1-800-447-8329 or 1-847-671-4380 • [www.sloanvalve.com](http://www.sloanvalve.com)