

SF-2100 SF-2150

► Description

Sensor Activated, Electronic, Pedestal Hand Washing Faucet for tempered or hot/cold water operation.

► Models

- ☐ SF-2100 Series 6 VDC Plug-in Adapter Powered with Battery Backup
- ☐ SF-2150 Series Battery Powered

► Flow Rate

- ☐ 0.5 gpm/1.9 Lpm Max Flow Spray Head

► Specifications

ADA Compliant, Sensor Activated, 6 VDC, Chrome Plated Brass, Pedestal Hand Washing Faucet with the following features:

- Splash-proof Circuit Control Module
- Adjustable Infrared Sensor Range
- 36" (914 mm) Long Sensor Cable
- 24" (610 mm) Long Flex Hose
- Filtered Solenoid Valve with serviceable Strainer Filter
- Bak-Chek® Tee for Hot/Cold Supply
- 6 VDC Plug-in Adapter (Model SF-2100 only)
- Non-aerated Spray Head
- Includes Four (4) AA-size Batteries
- Includes appropriate Mounting Hardware
- Trim Plate Kit for 4" (102 mm) Centerset Sink

► Variations (add suffix to Model Number for inclusion with Faucet)

● Trim Plate (specify one)

- ☐ -4 4" Trim Plate for 4" Centerset Sink
- ☐ -8 8" Trim Plate for 8" Centerset Sink

● Temperature Mixing Valves

- ☐ BDM MIX-60-A Below Deck Mechanical Mixing Valve

► Accessories (specify separately)

● Standard Outlet

- ☐ SFP-13 0.5 gpm/1.9 Lpm Spray Head
- ☐ SFP-23 2.2 gpm/8.3 Lpm Aerator Spray Head

● Vandal Resistant Outlet

- ☐ EAF-15 0.5 gpm/1.9 Lpm Vandal Resistant Spray Head
- ☐ SFP-24 2.2 gpm/8.3 Lpm Vandal Resistant Aerator Spray Head

● Faucet Extension Kit

- ☐ SFP-30-A Faucet Extension Kit

● Adapters

- ☐ SFP-6 110 VAC/6 VDC Plug-in Adapter
- ☐ SFP-20 220 VAC/6 VDC Type G Rectangular (UK) Plug-in Adapter
- ☐ SFP-25 220 VAC/6 VDC Type C Round Pin (Euro) Plug-in Adapter
- ☐ SFP-26 220 VAC/6 VDC Type A Flat Blade (Asia) Plug-in Adapter
- ☐ SFP-35-A Gang Adapter Kit, includes 1 Plug-in Gang Adapter, 5 Splitter Cables and 1 Extension Cable
- ☐ SFP-36 71" (1800 mm) 120 VAC/6 VDC Plug-in Gang Adapter
- ☐ SFP-38 51" (1300 mm) Splitter Cable
- ☐ SFP-37 51" (1300 mm) Extension Cable



► ADA Compliant

► Automatic

The Sloan SF-2100 and SF-2150 Electronic Pedestal Hand Washing Faucets operate by means of an infrared sensor. When the user enters the sensor's effective range, the Solenoid activates the water flow. Tempered water flows from the Faucet until the user steps away. The Faucet then automatically shuts off.

► Hygienic

The ultimate in sanitary protection — there are no handles to turn or buttons to push. Helps to control the spread of infectious diseases.

► Economical


Automatic operation provides water usage savings over other faucet devices. Reduces maintenance and operation costs.

► Warranty

1 year (limited)

► Compliant to:

ASME A112.18.1



This space for Architect/Engineer approval

Job Name _____ Date _____

Model Specified _____ Quantity _____

Variations Specified _____

Customer/Wholesaler _____

Contractor _____

Architect _____

SF-2100 SF-2150

Description

Sensor Activated, Electronic, Pedestal Hand Washing Faucet for tempered or hot/cold water operation.

Models

SF-2100 Series 6 VDC Plug-in Adapter Powered with Battery Backup

SF-2150 Series Battery Powered

Flow Rate

0.5 gpm/1.9 Lpm Max Flow Spray Head

ELECTRICAL SPECIFICATIONS

Control Circuit

6 VDC Input/Output

Adapter

6 VDC Plug-in (Model 2100 only)

Battery Life

Four (4) Alkaline AA Batteries

2 years at 8,000 cycles/month

Solenoid Valve


6 VDC, Serviceable Strainer,
3/8" Compression Inlet, 1/2" NPSM
Outlet

Sensor Range

Nominal:


4" - 7" (102 mm - 178 mm)

SFP-30-A
OPTIONAL
FAUCET
EXTENSION
KIT

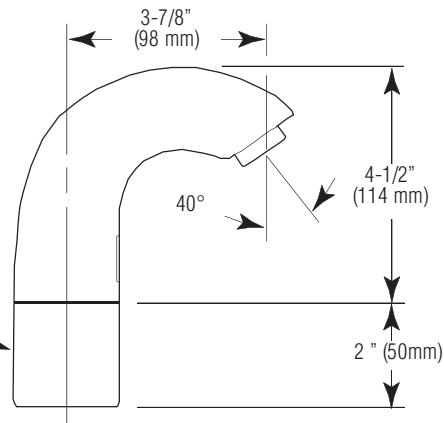


OPERATION


1. When a user's hands enter the sensing range, water flows from the spout.

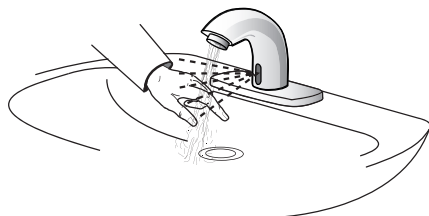


2. When hands are removed, the water flow stops.

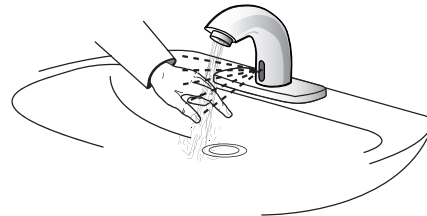

ROUGH-IN DIMENSIONS

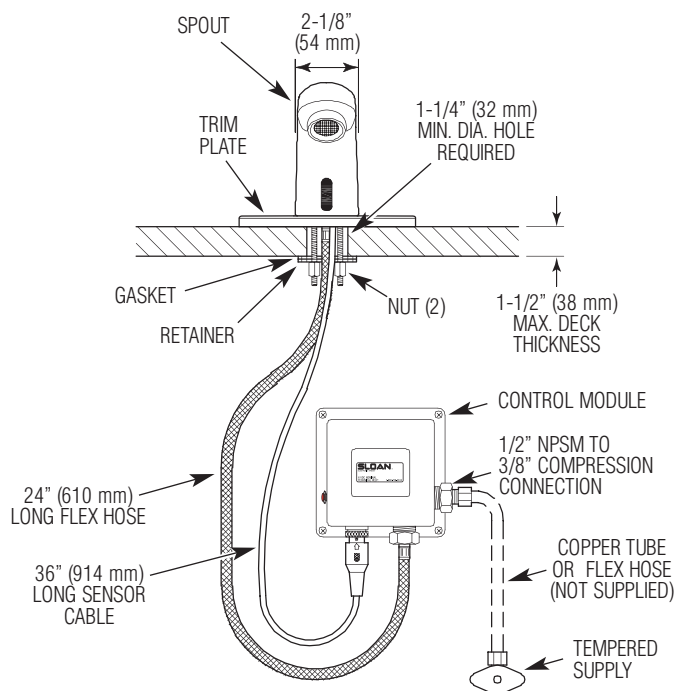

HOT AND COLD WATER SUPPLY APPLICATIONS (SPECIFY IN MODEL VARIATION)

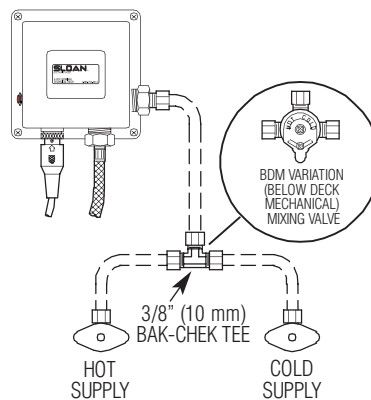

SLOAN

10500 SEYMOUR AVE. - FRANKLIN PARK, IL 60131
PHONE: 1-800-9-VALVE-9 - FAX: 1-800-447-8329
<http://www.sloanvalve.com>

Air Delights

11170 SW 5TH STREET, SUITE 100 - BEAVERTON, OR 97005
PHONE: 1-800-440-5556 - FAX: 1-503-643-8224
<http://www.airdelights.com> - Customer_Service@AirDelights.com